


Albarrie's Defender Series

HIGH TEMPERATURE FELTS

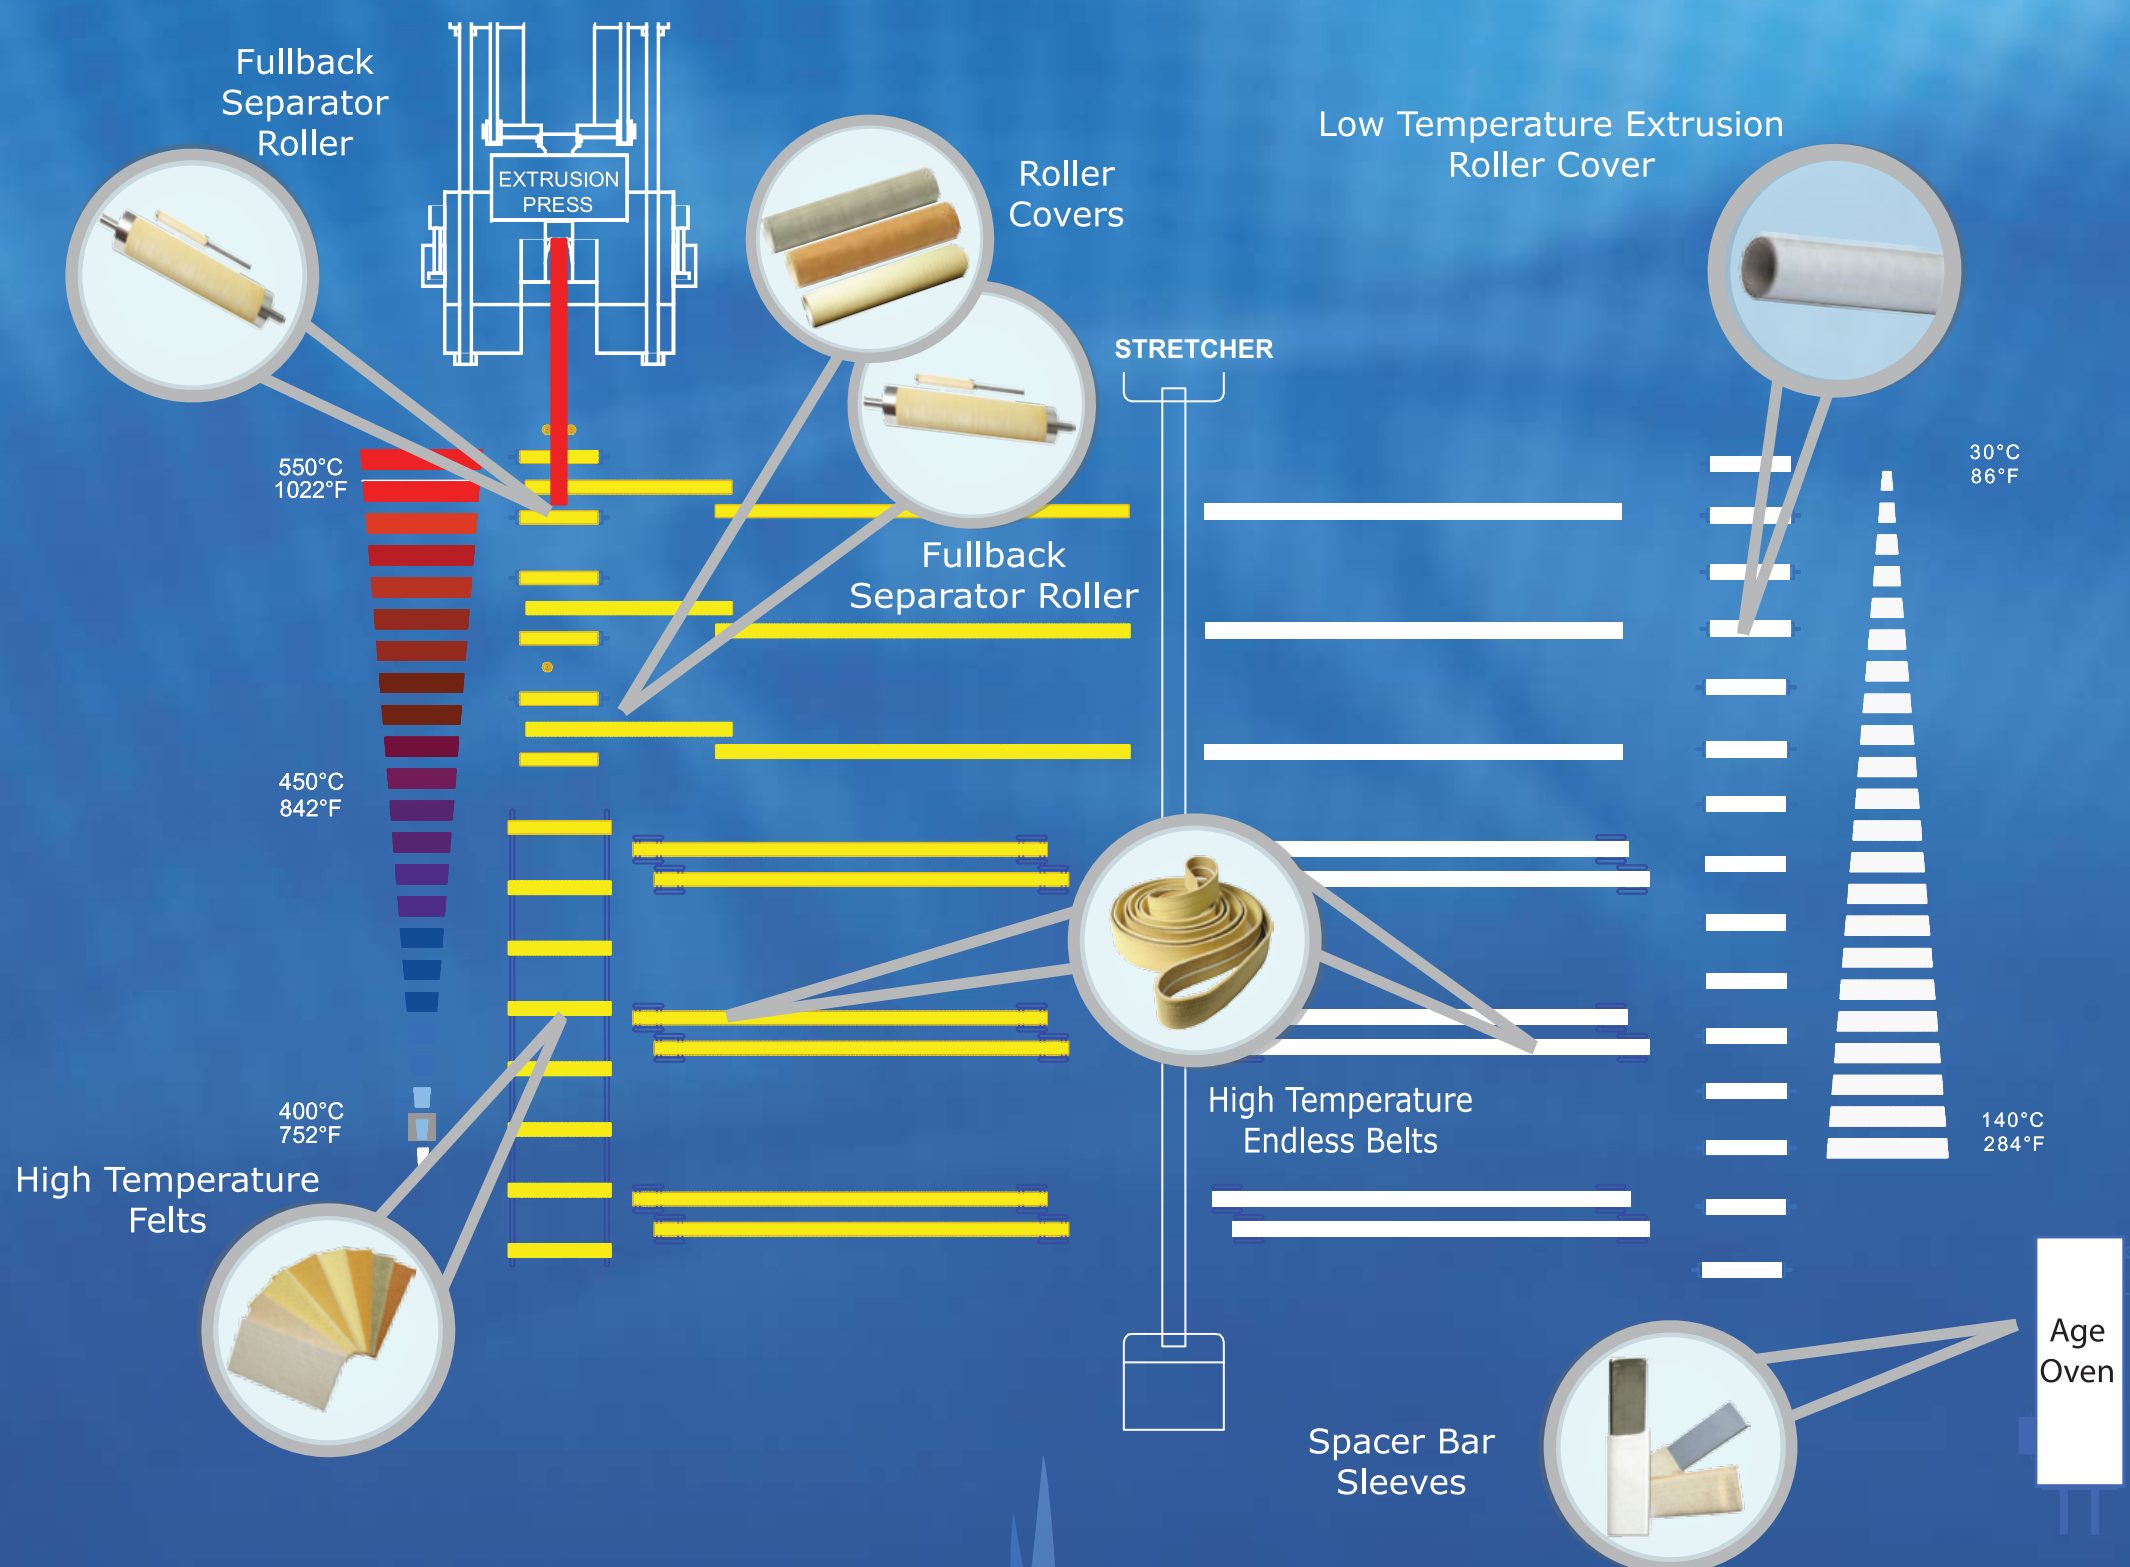

FIBER PROPERTIES

Fiber Type	Tensile Strength	Abrasion Resistance	Operating Temperature		Decomposition Temp	
			°F	°C	°F	°C
PBO	Excellent	Very Good	1020	550	1200	650
Kevlar®	Excellent	Very Good	840	450	975	525
Polyox	Fair	Fair	500	260	600	315
m-Aramid	Very Good	Very Good	450	230	750	400
PPS	Good	Good	430	220	500	260
Polyester	Good	Very Good	300	150	500	260
Polypropylene	Good	Good	190	90	320	160

Contact your local Albarrie representative for assistance with fiber selection and specific application instructions.

Toll-Free: 1-866-269-8275 • Tel: 705-737-0551 • Fax: 705-737-4044

ALBARRIEEXTRUSION.COM

The above chart is intended for reference purposes only as a guideline for the use of high temperature felts in the aluminum extrusion industry in accordance with Albarrie's application instructions. The information contained therein reflects data provided by fiber suppliers under specific and controlled conditions and is, to the best of our knowledge and belief, accurate and reliable as of the date compiled. Albarrie makes no representation, warranty or guarantee as to the accuracy, reliability or completeness of the above data. The end user is ultimately responsible for determining fitness of application of the products prior to use. Albarrie does not accept liability for any loss or damage that may occur from the use of this information nor do we offer any warranty against infringement.